



STAINLESS STEEL MONITORS


## 1-1/2" STAINLESS STEEL MONITORS

### Standard Features:

- 100% 304 Stainless Steel (corrosion resistant) construction
- 304 Stainless Steel ball bearings in joints
- Double seal swivels

### Options:

- Parallel handle, steering wheel handle
- 360 degree horizontal rotation
- 135 degree vertical rotation
- Optional pressure gauge and guard

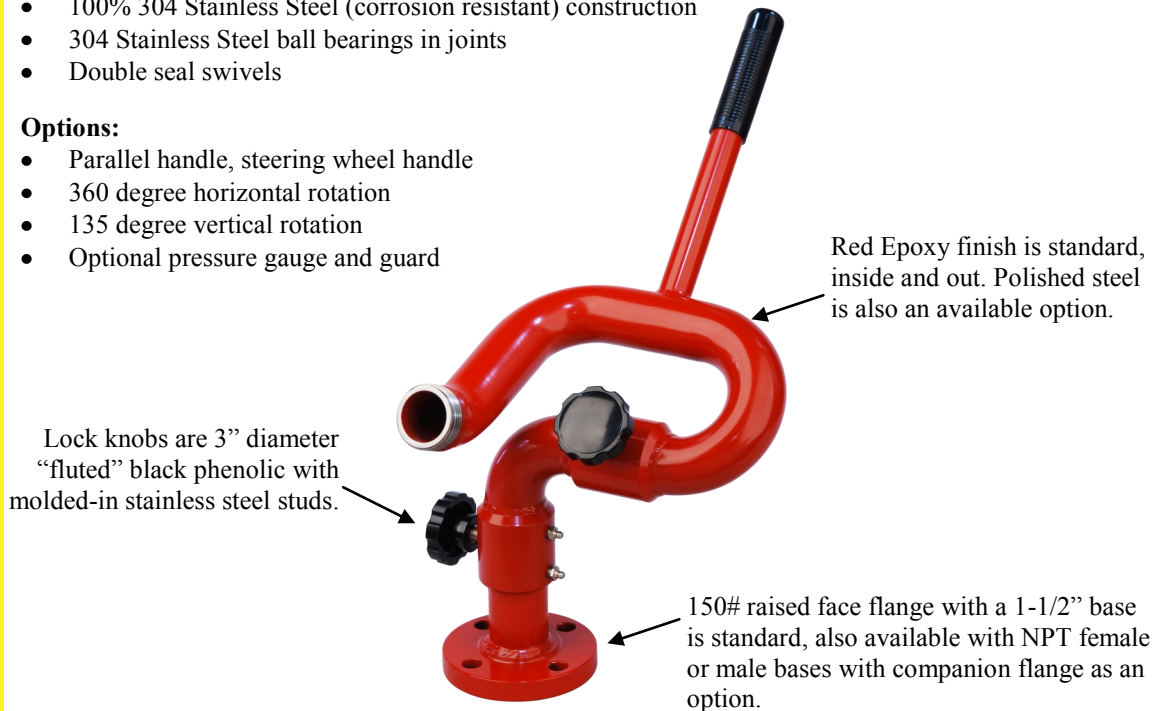

**FP1S-125 SHOWN**

**Potter Roemer / Fire Pro®** stainless steel monitors reflect the highest standards in the industry. Their 100%, type 304 stainless steel construction is a corrosion resistant and available in a high-polish finish. A vertical blade lock, parallel control handle, pressure gauge, and vinyl dipped steering wheel control (#FP3523) with polished stainless steel connector bracket are all options that create a monitor tailored for distance, accuracy and reliability.

MODEL	HEIGHT In (mm)	WIDTH In (mm)	WEIGHT Lbs (kg)	INLET In (mm)	OUTLET In (mm)	GPM In (mm)
FP1S-125	18 (457)	11 (279)	20 (9)	1-1/2" FLANGE (38)	1-1/2" (38)	125 (473)
FP1(F/M)S-125	18 (457)	11 (279)	20 (9)	1-1/2" NPT (F) (38)	1-1/2" (38)	125 (473)

[WWW.FIREPROMONITORS.COM](http://WWW.FIREPROMONITORS.COM)

**FIRE PRO NOZZLES AND MONITORS** • 17541 HURLEY STREET • CITY OF INDUSTRY, CA 91744 USA •  
**PHONE** 877-917-5800 • 626-937-4723 • **FAX** 626-937-4707 • **EMAIL:** info@firepromonitors.com  
 Fire Pro is a member of Acorn Engineering's Family of Companies