

ALUMINUM FITTINGS

+ B-STYLE WELD-ONS	1
+ B-STYLE HOSE SETS	2



WWW.WILLOC.COM • 1.800.801.0123
2150 106TH LANE NE, BLAINE, MN 55449



ALUMINUM BALL & SOCKET WELD-ON SET			
2"	732 AWA2	1.55 lbs	
3"	732 AWA3	3.40 lbs	
4"	732 AWA4	6.95 lbs	
5"	732 AWA5	10.15 lbs	
6"	732 AWA6	14.10 lbs	
8"	732 AWA8	20.30 lbs	



ALUMINUM BALL / MALE WELD-ON			
2"	732 BA2	0.25 lbs	
3"	732 BA3	0.45 lbs	
4"	732 BA4	1.15 lbs	
5"	732 BA5	1.65 lbs	
6"	732 BA6	2.15 lbs	
8"	732 BA8	3.20 lbs	



ALUMINUM SOCKET / FEMALE WELD-ON			
2"	734 AA2	0.30 lbs	
3"	734 AA3	0.70 lbs	
4"	734 AA4	1.40 lbs	
5"	734 AA5	2.05 lbs	
6"	734 AA6	2.60 lbs	
8"	734 AA8	3.95 lbs	


VACUUM RATING

30 inches hg

PRESSURE RATING

2 & 3" = 290 psi

4 - 8" = 175 psi

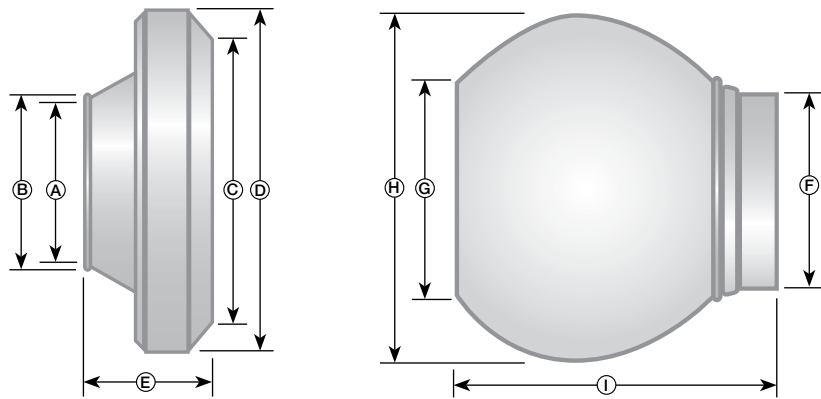

PRICE AND DISCOUNT STRUCTURES SUBJECT TO CHANGE WITHOUT NOTICE.

MALE MECHANICAL SPECS

Specifications to 1/100th of an inch // Specifications subject to change

SIZE	A	B	C	D	E	F	G	H	I
2"	2.01	2.28	2.80	3.54	1.42	2.36	1.89	2.80	2.32
3"	3.01	3.35	3.88	4.88	1.65	3.39	2.99	3.86	3.15
4"	4.02	4.41	5.67	6.69	2.20	4.37	4.21	5.67	4.41
5"	5.04	5.35	5.98	7.72	2.36	5.31	4.88	6.26	5.20
6"	6.04	6.42	7.13	8.50	2.44	6.38	5.55	7.09	5.39
8"	8.01	8.86	9.13	10.71	3.27	8.39	7.72	9.06	6.46

© 2008 WIL-LOC

WIL - 102108

NON-STOCK ITEM

SIZE


PART NUMBER

WEIGHT



ALUMINUM BALL & SOCKET HOSE SET

2"	775 HSAA2	2.75 lbs	
3"	775 HSAA3	6.35 lbs	
4"	775 HSAA4	10.45 lbs	
6"	775 HSAA6	22.40 lbs	
8"	775 HSAA8	33.55 lbs	



ALUMINUM BALL / MALE HOSE TAIL END

2"	760 HTMA2	0.75 lbs	
3"	760 HTMA3	1.75 lbs	
4"	760 HTMA4	3.00 lbs	
6"	760 HTMA6	6.15 lbs	
8"	760 HTMA8	9.40 lbs	



ALUMINUM BALL / FEMALE HOSE TAIL END

2"	770 HTFA2	1.00 lbs	
3"	770 HTFA3	2.25 lbs	
4"	770 HTFA4	3.00 lbs	
6"	770 HTFA6	7.00 lbs	
8"	770 HTFA8	11.15 lbs	



GALVANIZED LEVER LOCKING RING

2"	273 LR2	1.00 lbs	
3"	273 LR3	2.25 lbs	
4"	273 LR4	4.40 lbs	
6"	273 LR6	6.45 lbs	
8"	273 LR8	9.35 lbs	

PRICE AND DISCOUNT STRUCTURES SUBJECT TO CHANGE WITHOUT NOTICE.

TECH TIP

Wil-loc Aluminum fittings are completely interchangeable with Wil-loc galvanized steel or stainless steel fittings. For certain applications, where weight is a concern, aluminum fittings may be the best solution.

Wil-loc aluminum weld-ons are manufactured using a mold cast aluminum process, producing a high quality, consistent part that welds quickly and easily to aluminum pipe or components.

For easier coupling (especially of larger sizes) lubricate O-rings with Wil-lube (as seen in Specialty section). This will allow the ball to seat into the socket easier during first time usage.

